

Imagine the invisible

Industrial



# Bobcat-1.7-320

Uncooled smart InGaAs camera


## Smart and sharp imaging for reliable quality control

With superior image quality the Bobcat-1.7-320 is available as a complete digital infrared camera system with an embedded Digital Signal Processor (DSP) for intelligent real-time image processing reducing the overall cost. The very compact housing also allows for easy system integration.


In addition the Bobcat-1.7-320 comes with an analog and digital interface.

The camera interfaces to a PC via standard Ethernet or CameraLink connection.


With the Bobcat-1.7-320 NIR camera you can look through glass, so standard available C-Mount lenses and protective camera housings can be used. Again making this camera affordable for a wide variety of industrial applications.

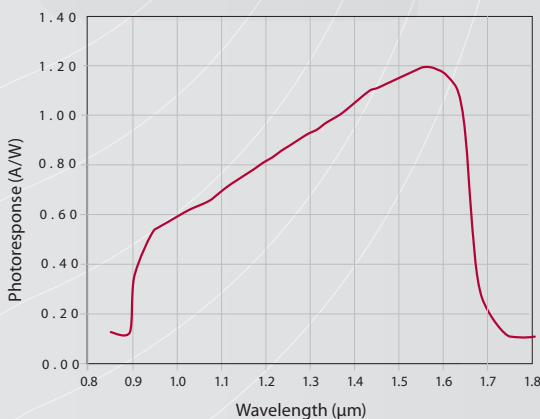

Designed for use in

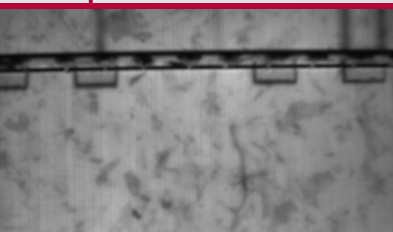


☛ Solar cell inspection

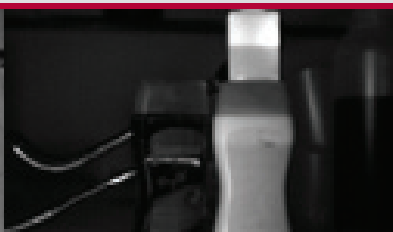

☛ Fluid level monitoring



☛ Stress analysis

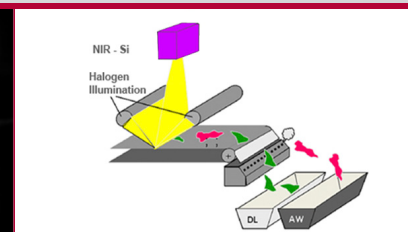

☛ Waste sorting

### Applications

- Waste sorting
- Food inspection
- On-line quality control
- Thermal imaging of hot objects (300°C to 800°C range)

### Benefits & Features

- High sensitivity
- Flexible and easy-to-use
- Ethernet standard interfaces
- Fast time to market with easy integration
- Flexible programming in an open architecture

# Broad range of accessories available to simplify your inspection


## ▶ Lens & filter options



## ▶ Inputs



## ▶ Software



- Xeneth basic
- Xeneth advanced (optional)
- Xeneth SDK (optional)
- Intelligent Quadrox Recording (optional)

## ▶ Outputs

## Specifications

Array specifications	Bobcat-1.7-320
Array Type	InGaAs
Spectral band	0.9 $\mu\text{m}$ to 1.7 $\mu\text{m}$
# Pixels	320 x 256
Pixel Pitch	20 $\mu\text{m}$
Array Cooling	Uncooled
Gain setting	High gain: 10fF Low gain: 90 fF
Pixel operability	99%
Camera Specifications	Bobcat-1.7-320
Lens (included)	
Focal length	16 mm f/1.4
Optical interface	C-mount (Broad selection of lenses available)
Imaging performance	
Frame rate	60 Hz in 8 bit mode 30 Hz in 16 bit mode
Integration type	Snapshot
Exposure time range	7 $\mu\text{s}$ - 70 ms (low gain)
S/N ratio	High gain: 62 dB Low gain: 69 dB
Interfaces	
Camera control	Ethernet (TCP/IP): Xeneth API/SDK CameraLink: XSP (Xeneth Serial Protocol)
Digital output	Ethernet (TCP/IP): 16 bit or 8 bit CameraLink: 16 bit base
Trigger	Trigger in; LVCMOS
Power requirements	
Power consumption	< 4.5 W at room temperature
Power supply	12 V
Physical characteristics	
Camera cooling	Passive cooling
Ambient operating temperature	0°C to 50°C
Humidity	Non-condensing

## Product selector guide

Part number	Digital	Frame rate	Analog
BO03C500	✓	60	PAL
BO03C500N	✓	60	NTSC

XB-033 issue 2 | Information furnished by Xenics is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. This information supersedes all previously supplied information.